

## **VT-410-AHD**




# VT410-AHD



### SIDE-VIEW CAMERA

A ruggedised, wide-view camera with flexible mounting, angle adjustment options and infrared night vision.

#### **Key features:**

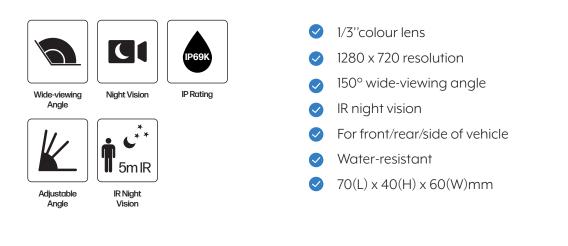




t +44 (0) 1246 225 745
e info@visiontrack.com
w visiontrack.com
s support.visiontrack.com

#### 

VisionTrack Copyright © 2020 - All Rights Reserved. All manufacturers specifications are subject to change without notice. No liability will be accepted by VisionTrack for any errors or omissions in this information.





## **VT-410-AHD**

#### **Specifications:**

Image Device	Pixelplus 1/3" Color CMOS PC1089
TV System	PAL / NTSC
Effective Pixels	728 x 488 pixels
Sensing Area	4.6228 mm x 3.6112 mm
Scanning System	2:1 Interlace
Sync. System	Internal
Resolution	500 TV Lines
Minimum Illumination	0.1 Lux (day), 0 Lux (with IR)
Microphone	Yes
Video Output	1.0 vp-p, 75 Ohm
Gamma Consumption	0.45
AGC	Auto
S/N Ratio	Better than 48 dB
White Balance	Auto
Electronic Shutter	1/50 Sec1/100000 Sec. (PAL) / 1/60 Sec1/100000 Sec. (NTSC)
BLC	Auto
Current Consumption	Day: 12V / 55mA; Night: 12V / 120mA
Operating Temperature	-20°C~70°C, RH 95% Max.
Storage Temperature	-30°C~80°C,RH95% Max.
Lens	f = 1.7mm, F= 2.0
Lens Angle	150°



Front

t +44 (0) 1246 225 745
e info@visiontrack.com
w visiontrack.com
s support.visiontrack.com



Side



Back



VisionTrack Copyright © 2020 - All Rights Reserved. All manufacturers specifications are subject to change without notice. No liability will be accepted by VisionTrack for any errors or omissions in this information.