

VT8000




VT8000

12-CHL FULL HD 1080P MOBILE DVR

The **VT8000** is a high performance, ruggedised, 12-channel mobile digital video recorder specifically designed for in-vehicle recording and monitoring. The MDVR captures, records and manages highdefinition video and enables GPS positioning technology, with built-in connectivity, advanced video compression and Wi-Fi for wireless data upload.

Key features:

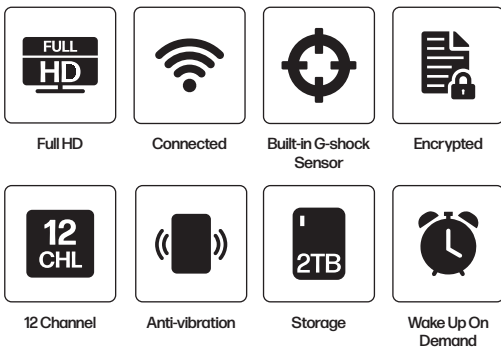

- ✔ Supports 8-channels AHD (1080p) + 4-channels IPC (1080p)
- ✔ Modular design for easy maintenance
- ✔ Revolutionary anti-vibration technology
- ✔ Supports 2.5" 2TB hard disk storage and SD card for mirror recording
- ✔ Dual streams for local recording and wireless transmission
- ✔ Internal GPS for location tracking
- ✔ Connected for live view and remote management
- ✔ 295(L) x 89(H) x 222(W)mm



t +44 (0) 1246 225 745
e info@visiontrack.com
w visiontrack.com
s support.visiontrack.com

VT8000

Specifications:

Function Overview	Preview, Recording, Playback, Network, Locating
OS	Linux 3.0.8
Control Mode	CP4, Easy Check, Network (4G WIFI), Mouse
Video Input	8 channels AHD (1080P) + 4 channel IPC (1080P)
Video Output	2 channels
Total Resource	PAL: 8x720P@25FPS(AHD) + 4x1080P@30FPS(IPC) Or 8x1080P@12FPS(AHD) + 4x1080P@30FPS(IPC) NTSC: 8x720P@30FPS(AHD) + 4x1080P@30FPS(IPC) Or 8x1080P@15FPS(AHD) + 4x1080P@30FPS(IPC)
Video System	Electrical level: 1Vpp Impedance: 75Ω NTSC/PAL optional
Audio Input	12 channels
Audio Output	2 channels
Display Split	1/4/9 Image display
OSD	GPS information, alarm, temperature, acceleration, voltage, device information, software version, MCU version, network status
Operation Interface	Semi-transparent GUI
Video/Audio Compression	Video: H.264 Audio: ADPCM, G.711A, G.711U
Image Resolution	PAL: 1080P, 720P, WDI(928X576), WHDI(928X288), WCIF(464X288), DI(704X576), HDI(704x288), CIF(352x288); NTSC: 1080P, 720P, WDI(928X480), WHDI(928X240), WCIF(464X240), DI(704x480), HDI(704x240), CIF(352x240); Digital: 720P(1280X720)
Image Quality	8 Levels adjustable
Recording Mode	Schedule/alarm(sensor trigger, speed, acceleration, video loss, temperature)
Pre-recording	0-60 minutes
Post-recording	0-30 minutes
Mirror Recording	Yes
Playback Channel	4 channels by local playback
Search Mode	Date/time, channel, event
Network 4G	4G, EVDO/WCDMA/TDD-LTE/FDD-LTE
Network WIFI	802.11b/g/n
GPS	Location tracking, speed detection and time sync
Storage	Supports 2.5" hard disk up to 2TB
Interface USB	USB2.0 x 2
Interface RS232/RS485	RS232 x 2, RS485 x 2
Interface Sensor	8 inputs, 2 outputs
Interface Mic	1 MIC interface
Interface Panel	CP4 Optional
Power Input	DC8-36V, ACC
Power Output	5V@500mA, 12V@500mA
Power Consumption	105.3W
Modular Design	Yes
Dimension (L x W x H)	295 x 222 x 89 mm
Weight	2.6Kg
Operating Temperature	-40°C - +70oC (with heater) or -10oC - +70oC
Operating Relative Humidity	8%-90%

